

## KM700 系列防火纤维

材质: 经特殊高温处理 E-grade texturized fiberglass

耐温(软化点): 830°C


耐温(长时间): 约 700°C

特性: 大幅减少高温所致之脆化现象并达到

- 较高之强度保持率

- 柔韧性

应用范围: 炉门遮帘, 高温膨胀节, 高温保温布包 (如汽机, 柴油引擎排气)

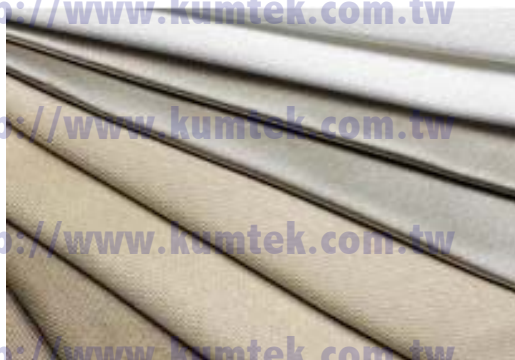

## 耐热保温布-产品规格

产品代号	厚度 (mm)	标称单位面积重 (g/m <sup>2</sup> )	编织方式	宽度 x 长度 (m)
8-61HT	0.8	610	Plain	1.5 x 45.7
7-88HT	0.7	880	Satin	1.5 x 45.7
10-81HT	1.0	810	Plain	1.5 x 45.7
20-120HT	1.7	1220	Plain	1.5 x 45.7
14-176HT	1.4	1760	Satin	1.5 x 45.7
30-210HT	3.0	2170	Plain	1 x 45.7

标准颜色: 蓝 or 土黄



Thermotech cannot predict all of the potential applications for which customers may attempt to use our products. Our products will have varying degrees of effectiveness for each potential application depending on the maximum temperature attained the length of use, and the amount of temperature fluctuation. If the customer has any questions regarding the use of our products in a particular application, please contact Thermotech and we will provide a sample for testing.

This product is not warranted against injuries or damages of any kind caused by uses for which this product was not designed, intended, or tested by Thermotech

*Your Solution for Insulation Since 1989!*