


KM600 & KM1000

針扎毯

(非陶瓷纖維毯)

一個革命性的隔熱毯的長度由長纖維連續耐高溫長絲針扎而成。纖維是非吸入性纖維可豈沒有防護服情形下安全使用。針扎毯柔韌富有彈性，易於製作

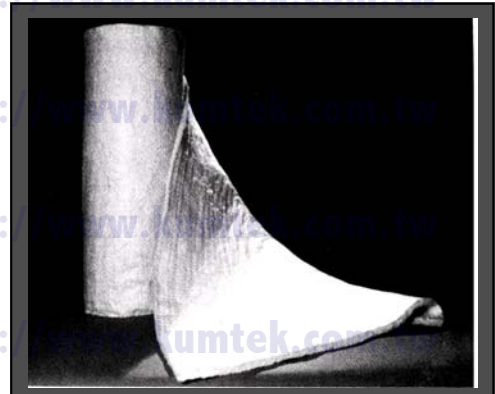

應用範圍: 管道包覆, 模具包覆, 墊片, 隔熱毯...

行業: 石化 - 鋼 - 鋁發電, 鑄造, 玻璃, 汽車

技術資料

型號	KM600		KM1000	
材質	E 級玻璃纖維		非結晶型二氧化矽纖維	
成分	SiO ₂	55%	SiO ₂	94-96%
	CaO	18%	CaO	--
	Al ₂ O ₃	16%	Al ₂ O ₃	3-4%
	MgO+B ₂ O ₃	7%	MgO+B ₂ O ₃	--
連續使用溫度 °C	600		1000	
瞬間耐溫 °C(軟化點 或 熔點)	820		1650	
熱傳導率 (W/m.k.)	100 °C	0.42	115 °C	0.045
	293 °C	0.63	315 °C	0.088
	450 °C	0.80	450 °C	0.121
	565 °C	0.90	650 °C	0.200
標稱密度 (Kg/m ³)	165 +/- 20%		140 +/-20%	
標稱厚度 (mm)	3, 5, 6, 8, 10, 13, 25		6, 8, 10, 13, 25	
標準寬度 (m)	1.2		1.0	

All statements herein are expressions of opinion that we believe to be accurate and reliable, but are presented without guaranty or responsibility on our part. Statements concerning possible use of our products are not intended as recommendations for their use alone or in combination with any materials or elements to infringe any patents. No patent warranty of any kind, express or implied, is made or intended.

Your Solution for Insulation Since 1989 !